


# Guide til oprettelse Microsoft Graph App som kan sende mails på vegne af alle brugere i ens Microsoft 365 tenant.

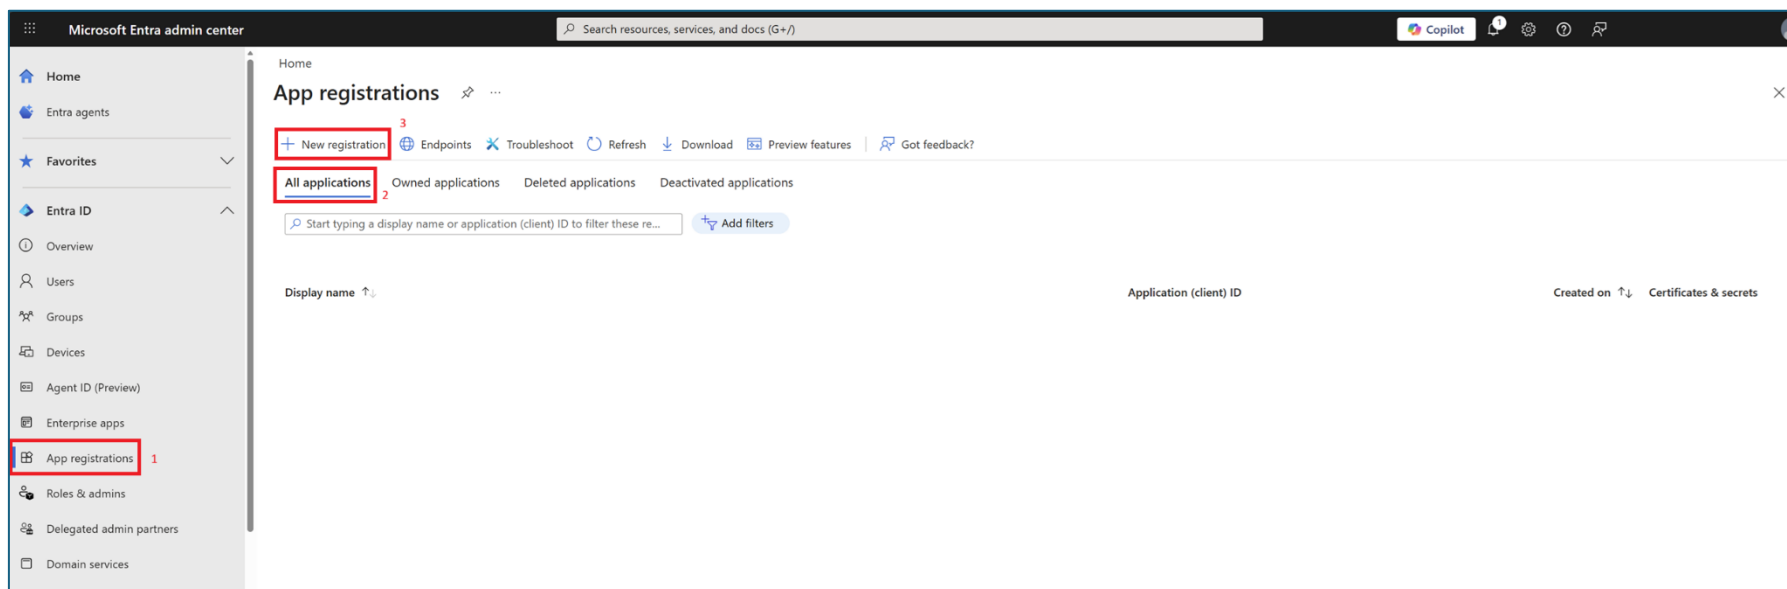

Home &gt; App registrations

## Register an application

### \* Name

The user-facing display name for this application (this can be changed later).



1. Angiv App navn (Valgfrit)

### Supported account types

Choose the account types that can use this application or access this API



[Help me choose](#)

2. Vælg **Single tenant only** (Default)

### Redirect URI (optional)

We'll return the authentication response to this URI after successfully authenticating the user. Providing this now is optional and it can be changed later, but a value is required for most authentication scenarios.



Register an app you're working on here. Integrate gallery apps and other apps from outside your organization by adding from [Enterprise applications](#).

By proceeding, you agree to the [Microsoft Platform Policies](#)

3. Tryk på **Register**

Search <<

Deactivate Delete Endpoints Preview features

Overview

- Quickstart
- Integration assistant
- Diagnose and solve problems

Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets** 1
- Token configuration
- API permissions
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

Support + Troubleshooting

- New support request

Essentials

Display name	: Chainbox	Client credentials	: <a href="#">Add a certificate or secret</a>
Application (client) ID	: 82140665-e37a-4997-bdf3-dd37d4f58474	Redirect URIs	: <a href="#">Add a Redirect URI</a>
Object ID	: 9950dd0a-fcd0-48cf-9201-b6c0b391ac92	Application ID URI	: <a href="#">Add an Application ID URI</a>
Directory (tenant) ID	: a3d00fb6-5811-4779-8206-ce49854d4e94	Managed application in I...	: <a href="#">Chainbox</a>
Supported account types	: <a href="#">My organization only</a>	State	:  Activated

Get Started Documentation

## Build your application with the Microsoft identity platform

The Microsoft identity platform is an authentication service, open-source libraries, and application management tools. You can create modern, standards-based authentication solutions, access and protect APIs, and add sign-in for your users and customers. [Learn more](#)



### Call APIs

Build more powerful apps with rich user and business data from Microsoft services and your own company's data sources.

[View API permissions](#)



### Sign in users in 5 minutes

Use our SDKs to sign in users and call APIs in a few steps. Use the quickstarts to start a web app, mobile app, SPA, or daemon app.

[View all quickstart guides](#)



### Configure for your organization

Assign users and groups, apply conditional access policies, configure single sign-on, and more in Enterprise applications.

[Go to Enterprise applications](#)

# Chainbox | Certificates & secrets

Search

Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets**
- Token configuration
- API permissions
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

Credentials enable confidential applications to identify themselves to the authentication service when receiving tokens at a web addressable location (using an HTTPS scheme). For a higher level of assurance, we recommend using a certificate (instead of a client secret) as a credential.

Application registration certificates, secrets and federated credentials can be found in the tabs below.

Certificates (0) **Client secrets (0)** Federated credentials (0)

A secret string that the application uses to prove its identity when requesting a token. Also can be referred to as application password.

+ New client secret <sup>1</sup>

Description	Expires	Value ⓘ	Secret ID
-------------	---------	---------	-----------

No client secrets have been created for this application.

# Chainbox | Certificates & secrets

Search << Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets
- Token configuration
- API permissions
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

Credentials enable confidential applications to identify themselves to the authentication service when receiving tokens at a web addressable location (using scheme). For a higher level of assurance, we recommend using a certificate (instead of a client secret) as a credential.

Application registration certificates, secrets and federated credentials can be found in the tabs below.

Certificates (0) **Client secrets (0)** Federated credentials (0)

A secret string that the application uses to prove its identity when requesting a token. Also can be referred to as application password.

+ New client secret

Description	Expires	Value	Secret ID
-------------	---------	-------	-----------

No client secrets have been created for this application.

## Add a client secret

1 Description

2 Expires

3

# Chainbox | Certificates & secrets

Search

Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets**
- Token configuration
- API permissions
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

Got a second to give us some feedback? →

Credentials enable confidential applications to identify themselves to the authentication service when receiving tokens at a web addressable location (using an HTTPS scheme). For a higher level of assurance, we recommend using a certificate (instead of a client secret) as a credential.

Application registration certificates, secrets and federated credentials can be found in the tabs below.

Certificates (0) **Client secrets (1)** Federated credentials (0)

A secret string that the application uses to prove its identity when requesting a token. Also can be referred to as application password.

+ New client secret

1. Noter Value (VISES KUN DENNE ENE GANG!)

Description	Expires	Value	Secret ID
Send mail	3/19/2028	KWa8Q~763UKo1zBismZB.pW3cKluQkzr...	76e22d4b-b8ec-41f7-9482-189b29d4bb61f

2. Opsæt rettigheder for API her.

# Chainbox | API permissions

Search Refresh Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets
- Token configuration
- API permissions**
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

Warning: Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted on their own behalf aren't affected. [Learn more](#)

Info: The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, or in organizations where this app will be used. [Learn more](#)

### Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

[+ Add a permission](#)  Grant admin consent for Ladefoged IT ApS

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (1)				
User.Read	Delegated	Sign in and read user profile	No	...

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

# Chainbox | API permissions

Search << Refresh Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets
- Token configuration
- API permissions**
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

⚠ Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that ap

ℹ The "Admin consent required" column shows the default value for an organization. However, user consent can be used. [Learn more](#)

### Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. To view all the permissions the application needs, click on the "Admin consent required" column. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Ladefoged IT ApS

API / Permissions name	Type	Description
Microsoft Graph (1)		
User.Read	Delegated	Sign in and read user profile

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try

## Request API permissions

Select an API

Microsoft APIs APIs my organization uses My APIs

### Commonly used Microsoft APIs

**Microsoft Graph** 1

Take advantage of the tremendous amount of data in Office 365, Enterprise Mobility + Security, and Windows 10. Access Microsoft Entra ID, Excel, Intune, Outlook/Exchange, OneDrive, OneNote, SharePoint, Planner, and more through a single endpoint.

- Azure Communication Services**  
Rich communication experiences with the same secure CPaaS platform used by Microsoft Teams
- Azure DevOps**  
Integrate with Azure DevOps and Azure DevOps server
- Azure Rights Management Services**  
Allow validated users to read and write protected content
- Azure Service Management**  
Programmatic access to much of the functionality available through the Azure portal
- Azure Storage**  
Secure, massively scalable object and data lake storage for unstructured and semi-structured data
- Data Export Service for Microsoft Dynamics 365**  
Export data from Microsoft Dynamics CRM organization to an external destination
- Dynamics 365 Business Central**  
Programmatic access to data and functionality in Dynamics 365 Business Central
- Dynamics CRM**  
Access the capabilities of CRM business software and ERP systems
- Intune**  
Programmatic access to Intune data

Home > App registrations > Chainbox

# Chainbox | API permissions

Search < Refresh Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets
- Token configuration
- API permissions**
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

**Request API permissions**

< All APIs

Microsoft Graph  
https://graph.microsoft.com/ Docs

What type of permissions does your application require?

**Delegated permissions**  
Your application needs to access the API as the signed-in user.

**Application permissions**  
Your application runs as a background service or daemon without a signed-in user. 1

Select permissions expand all

 2

Permission	Admin consent required
> Mail-Advanced	
> MailboxConfigItem	
> MailboxFolder	
> MailboxItem	
> MailboxSettings	
<b>Mail (1)</b> <span>3</span>	
<input type="checkbox"/> Mail.Read Read mail in all mailboxes	Yes
<input type="checkbox"/> Mail.ReadBasic Read basic mail in all mailboxes	Yes
<input type="checkbox"/> Mail.ReadBasic.All Read basic mail in all mailboxes	Yes
<input type="checkbox"/> Mail.ReadWrite Read and write mail in all mailboxes	Yes
<input checked="" type="checkbox"/> Mail.Send Send mail as any user	Yes <span>4</span>

5

⚠ Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted will be preserved.

ℹ The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column shows the default value for an organization.

**Configured permissions**

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions shows all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Ladefoged IT ApS

API / Permissions name	Type	Description	Admin consent required	Status
Microsoft Graph (1)				
User.Read	Delegated	Sign in and read user profile	No	

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

Search

Refresh | Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets
- Token configuration
- API permissions
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

Support + Troubleshooting

- New support request

You are editing permission(s) to your application, users will have to consent even if they've already done so previously.

Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted on their own behalf aren't affected. [Learn more](#)

The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, or in organizations where this app will be used. [Learn more](#)

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission  Grant admin consent for \*Tenant navn\* 1

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (2)				...
Mail.Send	Application	Send mail as any user	Yes	⚠ Not granted for Tenant navn
User.Read	Delegated	Sign in and read user profile	No	...

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

Search Refresh Got feedback?

- Overview
- Quickstart
- Integration assistant
- Diagnose and solve problems

### Manage

- Branding & properties
- Authentication (Preview)
- Certificates & secrets
- Token configuration
- API permissions**
- Expose an API
- App roles
- Owners
- Roles and administrators
- Manifest

### Support + Troubleshooting

- New support request

### Grant admin consent confirmation.

Do you want to grant consent for the requested permissions for all accounts in **tenant navn**? This will update any existing admin consent records this application already has to match what is listed below.

The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, or in organizations where this app will be used. [Learn more](#)

### Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for **tenant navn**

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (2)				
Mail.Send	Application	Send mail as any user	Yes	⚠ Not granted for <b>tenant navn</b>
User.Read	Delegated	Sign in and read user profile	No	...

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

Home > App registrations > Chainbox

Chainbox | API permissions

Search Refresh Got feedback?

Overview  
Quickstart  
Integration assistant  
Diagnose and solve problems

Manage  
Branding & properties  
Authentication (Preview)  
Certificates & secrets  
Token configuration  
API permissions  
Expose an API  
App roles  
Owners  
Roles and administrators  
Manifest

Support + Troubleshooting  
New support request

Successfully granted admin consent for the requested permissions.

Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted on their own behalf aren't affected. [Learn more](#)

The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, or in organizations where this app will be used. [Learn more](#)

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for tenant navn

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (2)				
Mail.Send	Application	Send mail as any user	Yes	Granted for tenant navn
User.Read	Delegated	Sign in and read user profile	No	Granted for tenant navn

To view and manage consented permissions for individual apps, as well as your tenant's consent settings, try [Enterprise applications](#).

Grant consent  
Grant consent successful

Done 😊